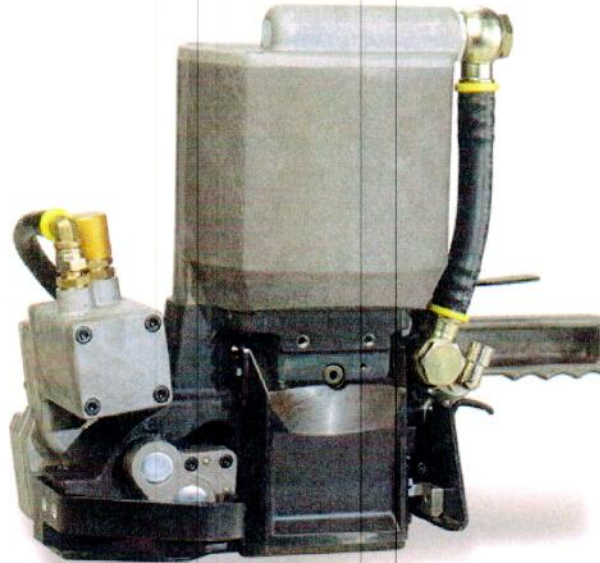


Pneumatic sealless combination steel strapping tool

Characteristics

Strapping qualities:	Uniflex and Ultraflex max. 1100 N/mm ² / 160'000 psi
Strapping dimensions:	widths 19.0 – 32.0 mm / 3/4 – 1 1/4"
thicknesses	0.63 – 1.30 mm / .025 - .050"
Weights:	23.5 kg / 51.8 lbs without suspension
	24.0 kg / 52.9 lbs with suspension (Standard A38.2401)
Average seal strength:	approx. 80 %
Versions available:	MicroLock™ system
Strap tension:	The tool is available for two different stages for strap tension, see chart
Suspensions (Optional):	Suspension bracket for standard application is supplied with the tool. Three different suspension brackets are available; have to be ordered separately, see accessories

Advantages

- Robust heavy duty strapping machine for flat packages, the perfect tool for high tension applications, designed for demanding applications in a rough environment
- Ruggedly designed high performance strapping tool meeting the requirements of the most demanding applications
- High reliability reduces down time; easy to service
- Easy simultaneous loading of both straps and pneumatic operation increase productivity considerably
- Pneumatic tensioning guarantees even tension of all straps applied
- The sealless joint reduces the overall strapping costs by approx. 10 % through the elimination of the seals
- The MicroLock™ sealless system guarantees a maximum of security of the sealless steel strapping joint against unlocking